


Overview

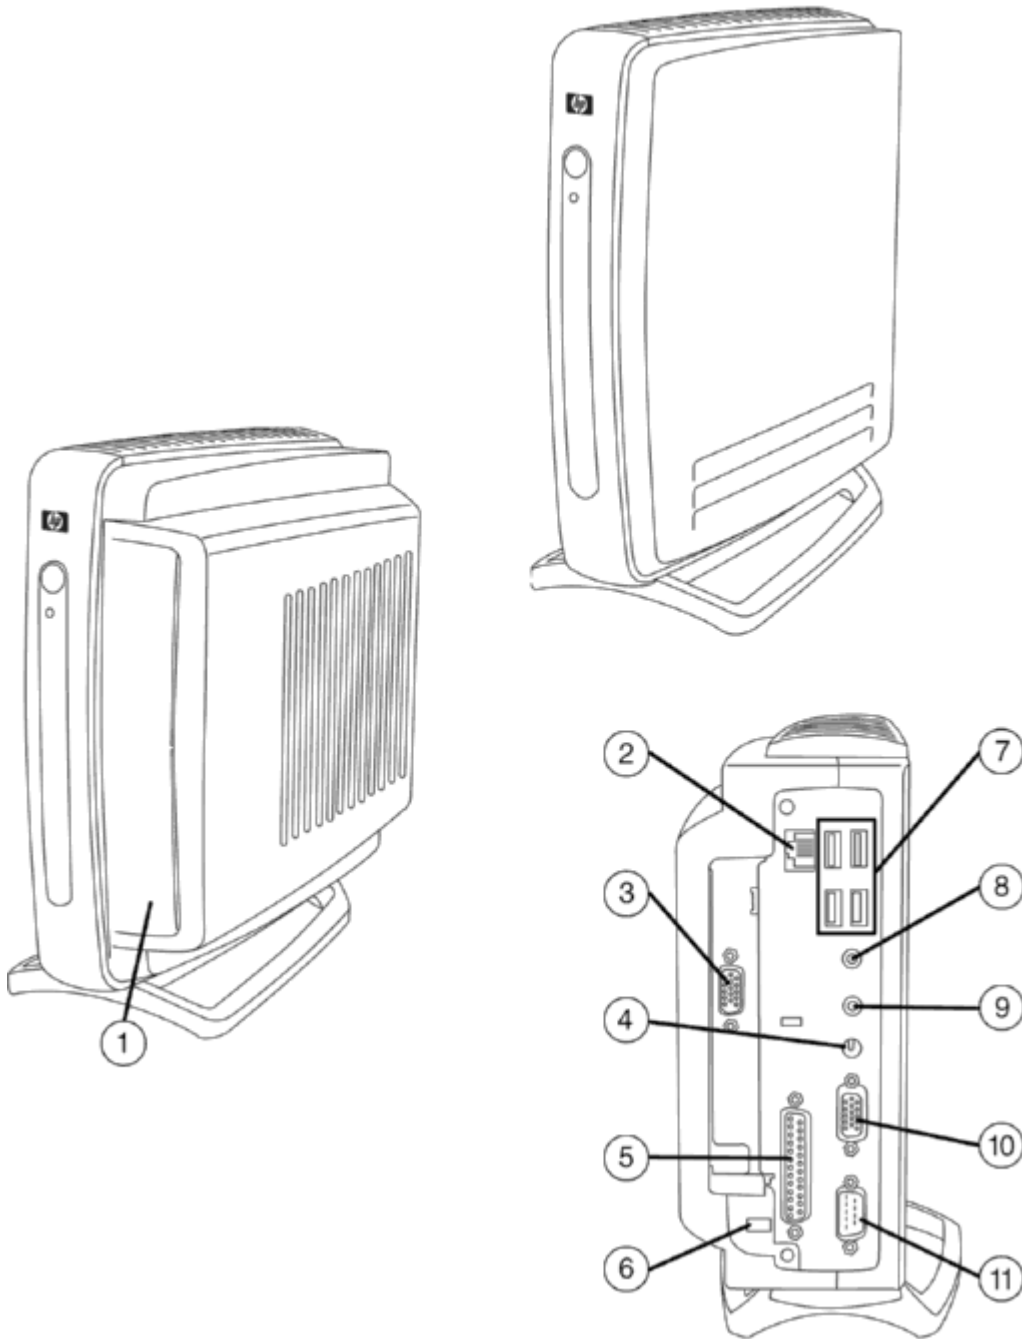

- 1. Optional PCI Expansion Module
- 2. RJ-45
- 3. Optional PCI Slot External Connector
- 4. DC Power Input
- 5. Parallel Connector
- 6. Security Lock

- 7. USB Connectors
- 8. Audio Connector - Mic In
- 9. Audio Connector - Line Out
- 10. Video Connector
- 11. Serial Connector

Overview

At A Glance

- Simplified IT management for the enterprise.
- Upgraded features and legacy support for mainstream corporate use
- Helps lower ownership costs and increase resource efficiency for each end-user
- 733 MHz processor
- Powerful, discrete graphics
- 128 MB of DDR SDRAM standard
- Optional PCI Expansion Module
- Broad range of support for options and peripherals
- Microsoft® Windows®CE .NET operating system
- Protected by Hewlett-Packard Services, including a limited three-year warranty – Certain restrictions and exclusions apply. For details, consult the Product Information Centre at 1-888-882-6672.

Standard Features - Models

DC641A#ABA	Processor	Transmeta Crusoe TM5800 733 MHz
	Flash (ROM)	32 MB
	Memory	128 MB DDR SDRAM (NOTE: 16 MB of system RAM is reserved for processor usage.)
	Operating System	Microsoft Windows CE .NET v4.20
	Browser	Internet Explorer 6.0
	Client Management Software	Altiris Deployment Solution
	Terminal Personalities Standard	Yes

Options

Monitors	HP L1502 15-inch TFT Flat Panel Monitor – Analog only	P9617D#ABA
	HP L1702 17-inch TFT Flat Panel Monitor – Analog only	P9621D#ABA
	HP L1530 15-inch TFT Flat Panel Monitor – Analog/Digital & Multimedia	P9624A#ABA
	HP L1730 17-inch TFT Flat Panel Display – Analog/Digital & Multimedia	P9625A#ABA
	HP L1925 19-inch TFT Flat Panel Display – Analog/Digital	P9626A#ABA
	HP L2035 20-inch TFT Flat Panel Display	P9614A#ABA
	HP v7550 17-inch (16.0-inch vis) Flat-face CRT Monitor	P9013A#ABA
	HP s9500 19-inch (18.0-inch vis) CRT Monitor	P9010A#ABA
	HP s7500 17-inch (16.0-inch vis) CRT Monitor	P9008A#ABA
	HP s5500 15-inch (13.8-inch vis) CRT Monitor	P9006A#ABA
	HP p930 19-inch (18.0-inch vis) Performance Natural-flat CRT Monitor	P9009D#ABA
	3000 Series Elo Entuitive 1725C 17-inch CRT Touchmonitor (USB) (http://www.elotouch.com)**	ET1725C-4UWE-3
	3000 Series Elo Entuitive 1525L 15-inch LCD Desktop Touchmonitor (USB) (http://www.elotouch.com)**	ET1525L-BUWC-1
Security	Compaq Security Lock	294316-B21; DC368A
	Identix BioTouch USB 200 Fingerprint Scanner (http://www.identix.com)**	BTU-200-ML5-300
Storage	HP 128-MB Disk on Key	DC190B
	HP 256-MB Disk on Key	DL973B
	Compaq External MultiBay	217388-001; DC373A
	Compaq MultiBay 1.44-MB Diskette Drive (requires External MultiBay)	226935-B25; DC362A
	Compaq MultiBay 60-GB Hard Drive (requires External MultiBay)	278420-B25; DC894A
	Compaq MultiBay 24X CD-ROM Drive (requires External MultiBay)	298452-B25; DC351A
Communications	HP PCI Expansion Module with Riser Card (supports single PCI device, sold separately)	DE961A
	HP WL220 Wireless PCI Adapter (requires PCI Expansion Module)	DC756B
	Zoom 2985 USB 56K External Modem from Zoom (http://www.zoom.com)**	2985-00-00C
Connectivity	HP Wireless USB Mouse and Keyboard	300403-008

Options

Printers	HP DeskJet 5550 (USB and parallel)	C6487C
	HP DeskJet 6122 (USB and parallel)	C8954B
	HP LaserJet 1200SE (USB and parallel)	C7047A
	HP DeskJet 3820 (USB and parallel)	C8952A

Accessories	40-W AC Adapter	DZ991A
	Mounting Bracket	DY928A

HP Care Pack Services	Pick Up & Return, CPU only, 4 yrs	U9603E
	Pick Up & Return, CPU only, 5 yrs	U9602E
	Next Day Exchange, HW Support, CPU only, 3 yrs	U4847E
	Next Day Onsite Response, 3 yrs	U4849E
	Next Day Onsite Response, 4 yrs	U7930E
	Next Day Onsite Response, 5 yrs	U7932E
	Next Business Day Onsite, HW Support, CPU Only, 4 yrs	U7931E
	Next Business Day Onsite, HW Support, CPU Only, 5 yrs	U7933E
	Next Day Exchange HW Support, CPU only, 4 yrs	U7927E
	Next Day Exchange HW Support, CPU only, 5 yrs	U7929E
	Post Warranty Service, Return to Depot, HW Support, CPU only	U6569PE
	Post Warranty Service Next Day Exchange, HW Support, CPU only	U4848PE
	Post Warranty Service, Return to HP	U6570PE
	Post Warranty Service, Next Day Onsite, CPU Only	U4850PE
	Installation for 2+ HP Desktop or Laptop; Basic, 1 yr	U7988E
	Installation for 1 HP Desktop or Laptop; Basic, 1 yr	U7987E

****The warranties for HP or Compaq branded products are set forth in the express limited warranty statements accompanying such products. Although these third-party products may work effectively on HP or Compaq thin clients, HP does not support or warrant third-party products, including the interoperability of such products with HP or Compaq thin clients. However, third-party manufacturers and vendors may provide their own warranties and support directly to you. Please contact the manufacturers and vendors listed previously for support on their products.**

Technical Specifications

Processor	Transmeta Crusoe TM5800 733 MHz		
Memory	Flash ROM	32 MB	
	System Memory	128 MB DDR SDRAM (NOTE: 16 MB of system RAM is reserved for processor usage.)	
Graphics	ATI Rage XC with 8-MB SDRAM discrete graphics memory, VESA monitor support		
	Mode	Refresh Rates	Colour Depth
	640 x 480	60, 70, 72, 75, or 80 Hz	8, 16, or 32-bit
	800 x 600	60, 70, 72, 75, or 80 Hz	8, 16, or 32-bit
	1024 x 768	60, 70, 72, 75, or 80 Hz	8, 16, or 32-bit
	1280 x 1024	60, 70, 72, 75, or 80 Hz	8, 16, or 32-bit
	1600 x 1200	60, 70, 72, or 75 Hz	8 or 16-bit
Input/Output/ Peripheral Support	Keyboard	Enhanced USB with Windows keys (104 keys) included	
	Mouse	Scroll USB mouse included	
	Printer	Local and/or network printers (RDP, ICA, LPD)	
	Video	VGA-type video output (DB-15)	
Audio	Output	Internal amplified speaker, 1/8-inch mini, full 16-bit stereo, 44-kHz sample rate	
	Input	1/8-inch mini microphone	
Security	Security lock slot (cable lock sold separately)		
Communications	Integrated Microsoft RDP 5.1 and Citrix ICA 6.3 for remote server access. Terminal personalities standard		
Networking	TCP/IP with DNS and DHCP support		
	10/100 BaseT Fast Ethernet, twisted pair (RJ-45)		
	Direct connection through RS-232, Point-to-Point Protocol (PPP), Point-to-Point over Ethernet (PPPoE), Point-to-Point Tunneling Protocol (PPTP), Layer-2 Tunneling Protocol (L2TP)		
	Multiple master browser support on ICA		
	Supports Citrix load balancing on ICA		
	SNMP support allows configuration of terminal settings, reporting of terminal information and sending traps		
	DHCP support for automatic firmware upgrades		
	Wake on LAN		
	PXE		
I/O ports and connectors	Four USB 1.1 ports, 1 serial, 1 parallel, RJ-45, 1 optional PCI		
Resident Operating System	Microsoft Windows CE .NET v4.20 with Internet Explorer 6.0		
Server OS Compatibility/ Support	Microsoft Windows NT Server 4.0, Windows NT Server 4.0 Terminal Services, Windows 2000 Server, Windows 2000 Server Terminal Services, Windows 2000 Advance Server, Windows 2000 Advance Server Terminal Services, and Citrix MetaFrame (thin-client/server solution, built for Microsoft Windows NT 4.0, Windows 2000 Server, and Windows 2000 Advanced Server Terminal Services)		

Technical Specifications

Software Included	Microsoft Windows CE .NET v4.20 preinstalled	
	Microsoft Internet Explorer 6.0 preinstalled	
	Microsoft Windows Media Player 9.0 for CE .NET preinstalled	
	Altiris Deployment Solution (client agent) preinstalled. Altiris Deployment Solution (management console) available as free download from Altiris at: http://www.altiris.com/hptc	
	JetCET Print Professional v3.01 preinstalled	
	Microsoft Windows Messenger v4.0 for CE	
Languages	Terminal Emulation Software	
	English	
Dimensions H x W x D (approximate)	Without stand	2.2 x 8.2 x 7.8 in (55 x 205 x 195 mm)
	With stand	9.2 x 4 x 7.8 in (230 x 100 x 195 mm)
	With optional PCI Expansion Module and without stand	3.2 x 8.2 x 8.28 in (80 x 205 x 207 mm)
	With optional PCI Expansion Module and stand	9.2 x 4.2 x 8.28 in (230 x 105 x 207 mm)
Weight (approximate)	With stand	3.07 lb (1.39 kg)
	With optional PCI Expansion Module and stand	3.29 lb (1.49 kg)
Environmental	Temperature range on	32° to 104° F (0° to 40° C)
	Temperature range off	-40° to 140° F (-40° to 60° C)
	Humidity	20% to 80% condensing/10% to 95% non-condensing
	Power	Worldwide auto-sensing 100-240 VAC, 50-60 Hz energy-saving automatic power-down
Regulatory Compliance	Ergonomics	German ZH1/618; EN29241-3, approved
	Safety	UL 1950, CSA 950; TÜV-GS (EN60 950) approved
	RF Interference	FCC Class B; CE Mark; EN55022B; VCCI
Warranty	Three-year limited warranty	
	NOTE: Certain restrictions and exclusions apply. For details, consult the Product Information Centre at 1-888-882-6672.	
Emulations and Terminal IDs Supported	Emulation	Terminal ID
	ADDS A2 AIXTerm ANSI BBS AT 386 DG 410/412 HP 700-92/96 HZ1500 IBM3151 IBM3270 IBM5250	70092, 70094, 70096, 2392A, 2622A Mod11, Mod31 3278-2 (24x80), 3278-3 (32x80), 3278-4 (43x80), 3278-5 (27x132), 3278-2-E (24x80), 3278-3-E (32x80), 3278-4-E (43x80), 3278-5-E (27x132), 3279-2 (24x80), 3279-3 (32x80), 3279-4 (43x80), 3279-5 (27x132), 3287-1 5291-1, 5292-2, 5251-11, 3179-2, 3196-A1, 3180-2, 3477-FC (27x132), 3477-FG (24x80), 3486-BA, 3487-HA, 3487-HC, 3812-1

Technical Specifications

SCO Console	
TA6530	
TVI910	
TVI920	
TVI925	
TVI950	
TVI955	
VT52	VT100, VT101, VT102, VT125, VT131, VT132, M2200, VT220, VT240, VT320, VT340, VT420, VT510, VT520, VT525
VT100	VT100, VT101, VT102, VT125, VT131, VT132, M2200, VT220, VT240, VT320, VT340, VT420, VT510, VT520, VT525
VT500 7-bit	VT100, VT101, VT102, VT125, VT131, VT132, M2200, VT220, VT240, VT320, VT340, VT420, VT510, VT520, VT525
VT500 8-bit	VT100, VT101, VT102, VT125, VT131, VT132, M2200, VT220, VT240, VT320, VT340, VT420, VT510, VT520, VT525
VT PCTerm	
Wyse PCTerm	
WY50	
WY50+	
WY60	

©Copyright 2005 Hewlett-Packard Development Company, L.P.

Microsoft, Windows, and Windows NT are trademarks and/or registered trademarks of Microsoft Corporation in the United States and other countries.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products and services are set forth in the express limited warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.